


- Notes:
1. All additional wiring will meet MIL-W-27859.
  2. All wiring shall be installed and harnessed, clamped, secured in accordance with AC43.13-1B, Chapter 7, 8, & 11.
  3. Ground testing will be performed in accordance with ABC Report No. ABC-006, latest revision.

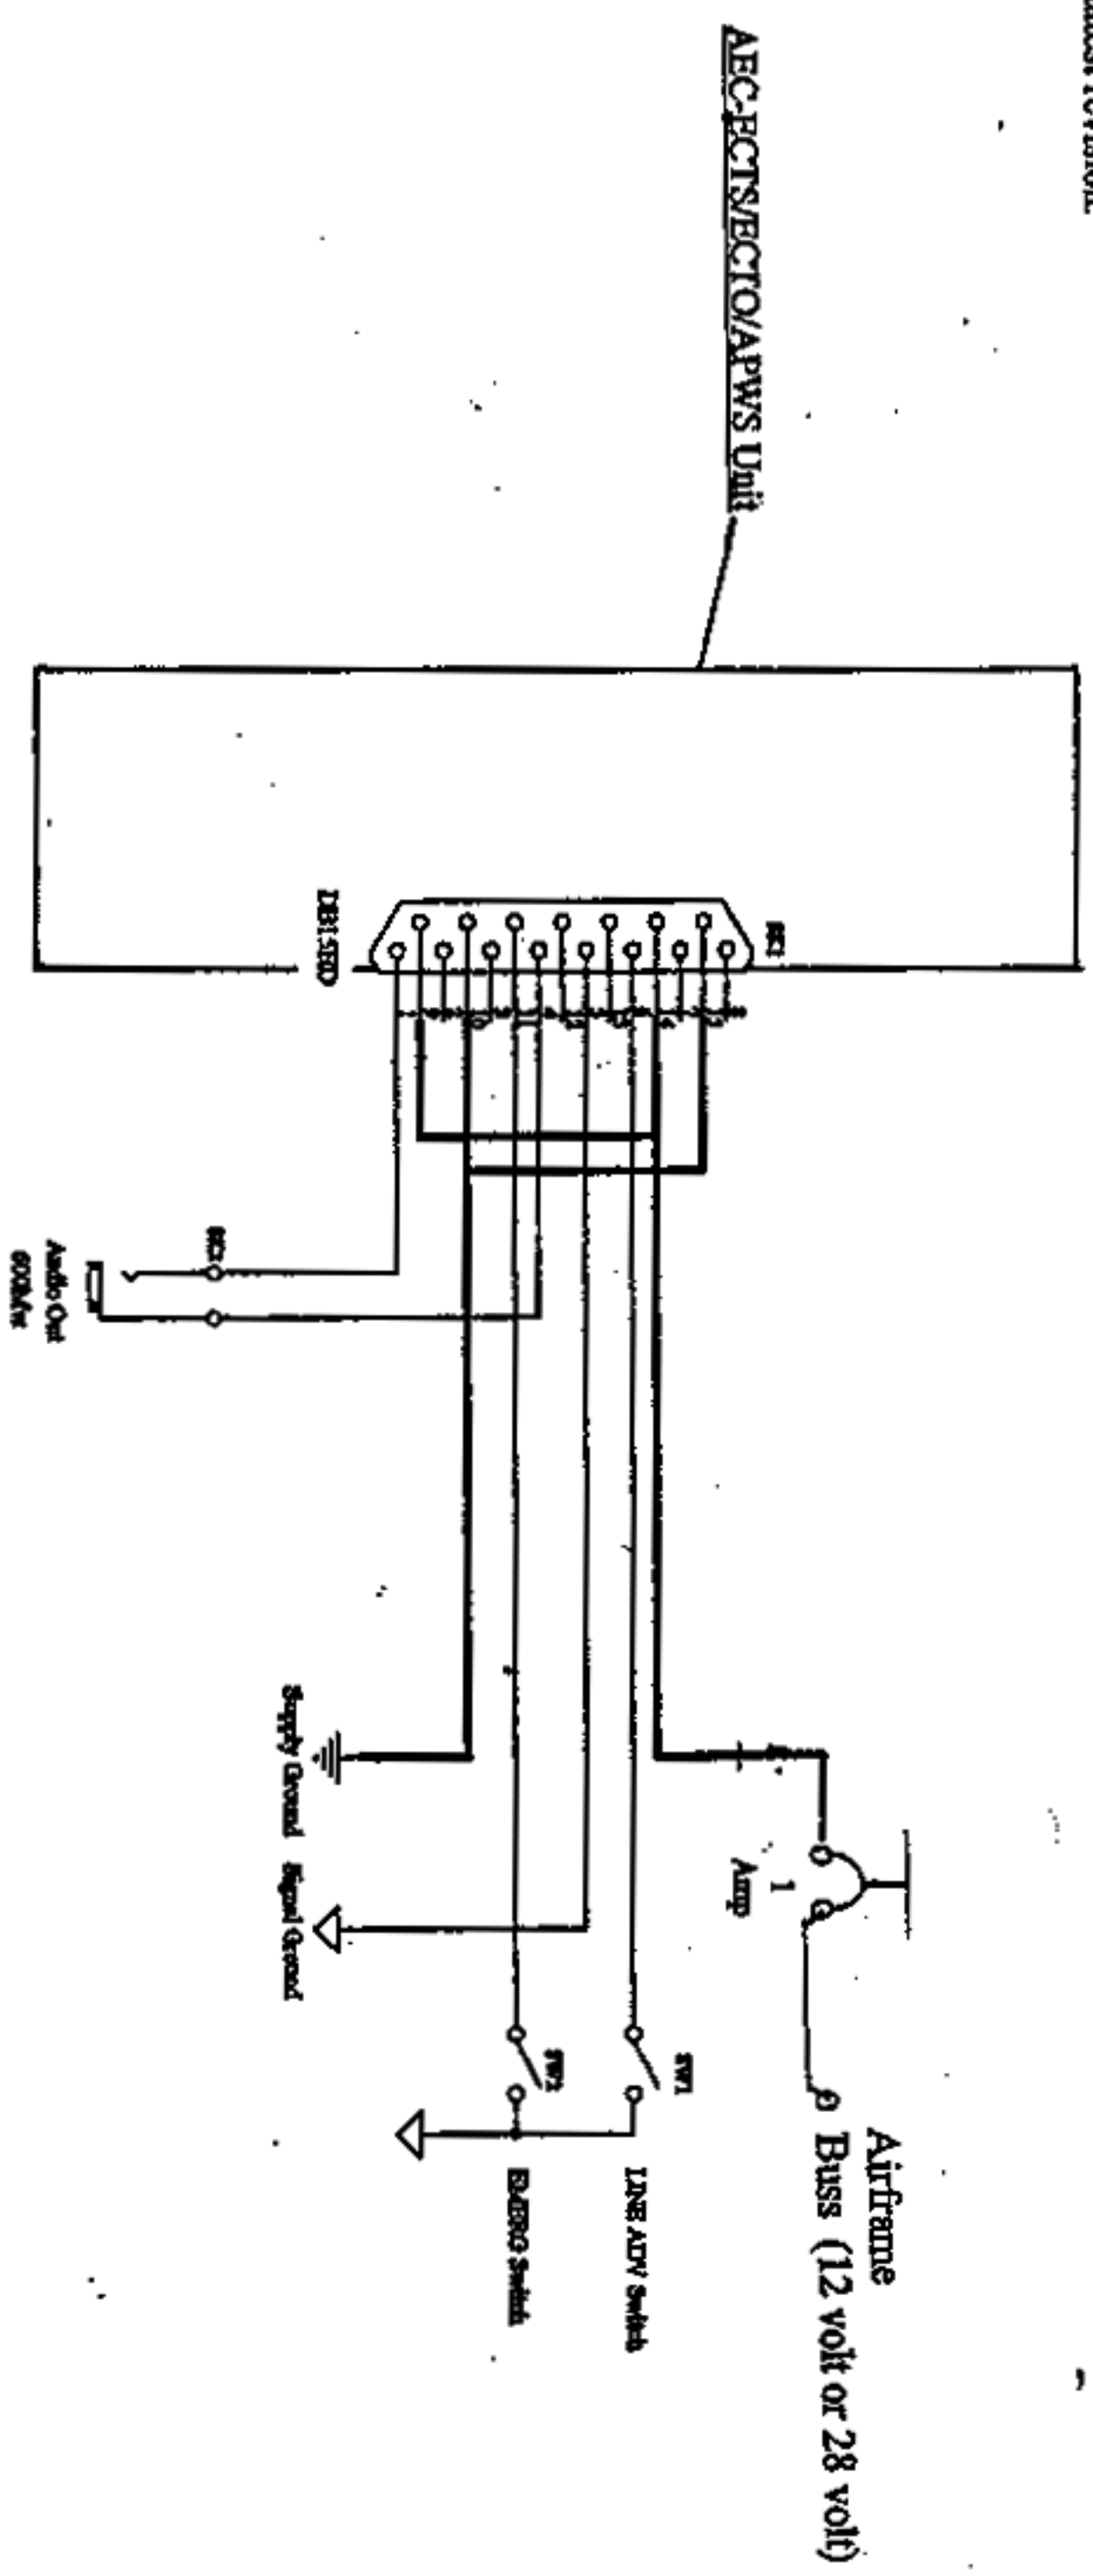

QTY	Part Number	Description	Manufacturer
2	61885	Terminal	AMP
1	ABC_ECTS_Instcable	ABC ECTS Installation	ABC
1	7277-2-1	Circuit Breaker	Terma Instrument
2	MPA-10R	Switches	Also (see note 9, Dwg ABC-009)
1	ABC-APWS	Electronic Checklix	ABC (see note 8, Dwg ABC-009)
1	ABC-ECTS	Electronic Checklix	ABC (see note 8, Dwg ABC-009)
1	ABC-ECTO	Electronic Checklix	ABC (see note 8, Dwg ABC-009)

Checklist Technologies	
Title:	Electrical Provisions Installation
Drawing No:	ABC-010
Revision:	JR
Date:	Nov. 14, 2003
Scale:	KDS
Approved:	[Signature]
Sheet 1 of 1	